






因改良等原因，规格以及外观有所变更时，不再另行通知，敬请谅解。

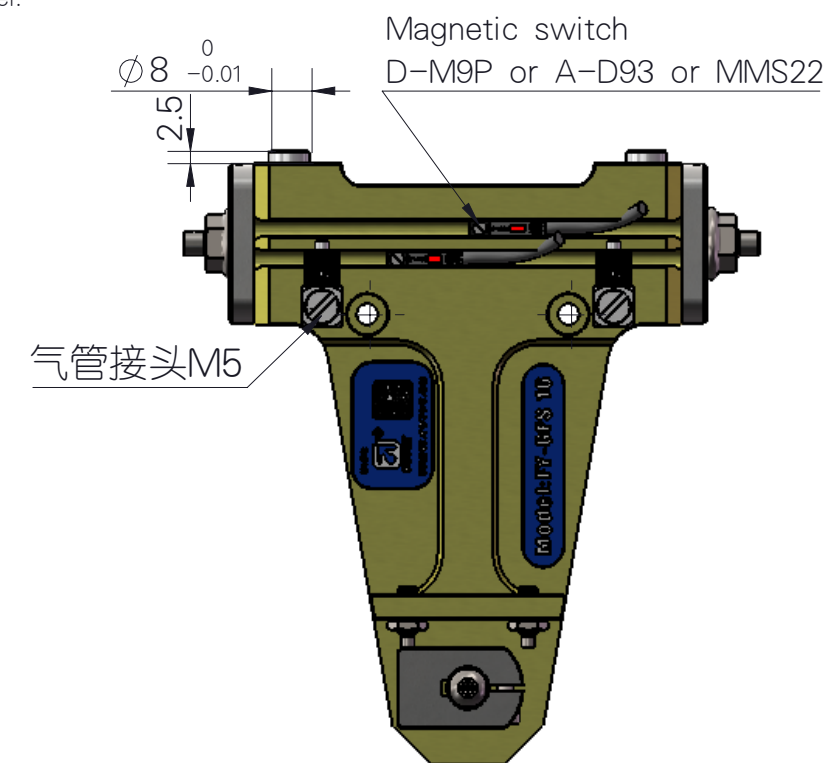

1. When operating the gripper, please keep away from it. Gripper and robot's moving parts, otherwise it will Risk of personal injury;
2. Because different objects have different friction coefficients, When clamping the workpiece for the first time, please try clamping in an open field. Ensure that the clamping is firm before the machine can work, otherwise it will. There is a risk that falling workpieces may damage machines or personnel.

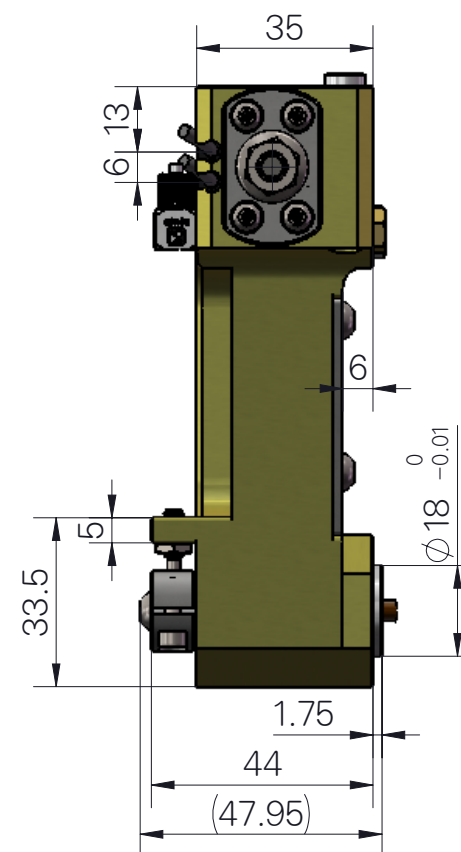

After 100 consecutive strokes to end positions

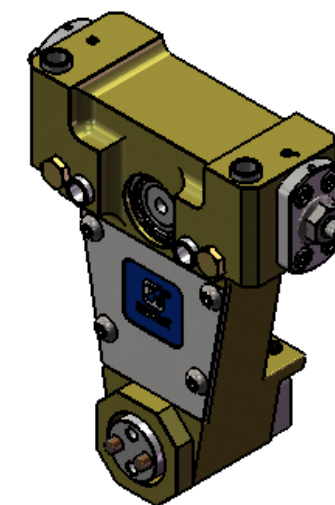

M_z 最大 17 Nm
 F_y 最大 350 N

① 力矩和力可能同时影响小齿轮。